

**apuro**

**15 litre Coffee  
Percolator/Urn**  
Instruction manual



**Model:  
CN295-A**

## Safety Tips

- Position on a flat, stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components on this product.
- Consult Local and National Standards to comply with the following:
  - Health and Safety at Work Legislation
  - Fire Precautions
  - Wiring Regulations
  - Building Regulations
- Ensure the location for the appliance can support its weight when full.
- DO NOT open the lid when the appliance is making coffee. Hot water may splash out.
- DO NOT immerse the appliance in water.
- DO NOT leave the machine unattended during operation.
- DO NOT touch the outer surfaces of the appliance. They become hot during use.
- Suitable for indoor use only.
- Always switch off and disconnect the power supply to the appliance when not in use.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience or knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Keep all packaging away from children. Dispose of the packaging in accordance to the regulations of local authorities.
- If the power cord is damaged, it must be replaced by an Apuro agent or a recommended qualified technician in order to avoid a hazard.



- Apuro recommend that this appliance is PAT tested on an annual basis to ensure the product remains safe.

## Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your Apuro product.

## Pack Contents

The following is included:

- Apuro Coffee Percolator
- Filter basket
- Percolator tube
- Instruction manual

Apuro prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your Apuro dealer immediately.

## Operation

Remove the appliance from the packaging. Make sure that all protective plastic film and plastic coatings are thoroughly removed from all surfaces.





**Note: Before using for the first time, clean the interior of the appliance and all parts in warm soapy water, then rinse thoroughly.**

### Brewing Coffee

1. Pour fresh cold water into the urn; Use the level indicator on the front of the appliance as a guide. Do not exceed the 'MAX' mark.
2. Insert the Percolator tube into the urn.



**Note: Ensure the base of the Percolator tube is securely located into the base of the percolator.**

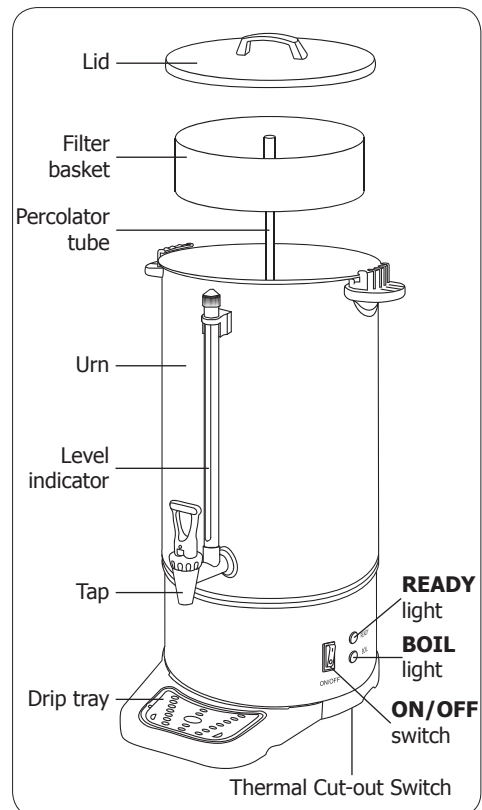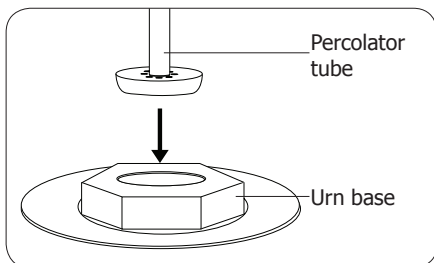

3. Slot the Filter basket over the Percolator tube. Fill the Filter basket with the desired amount of ground coffee.
4. Place the lid on the Coffee Percolator. Twist to lock.
5. Connect to the power supply. Set the **ON/OFF** switch to **I** (ON position) to begin brewing the coffee. The '**BOIL**' light illuminates.



**WARNING: The lid of the appliance becomes very hot during use. DO NOT TOUCH!**

6. The '**READY**' light is illuminated when the coffee has been brewed. The coffee is kept at serving temperature by the percolator.
7. Turn the **ON/OFF** switch to **O** (OFF position) when the level indicator is almost empty, or the equivalent of 3 cups of coffee is left in the urn, to prevent any damage to the heating element.



**Note: DO NOT allow the appliance to boil dry. This invalidates the warranty.**

## Serving

- Place a suitable vessel beneath the tap.
- Pull the tap towards you to begin dispensing the coffee.
- Raise the tap handle to close the tap.

## Emptying the Appliance

Drain the appliance by using the tap to empty the urn.

## Thermal Cut-Out Reset

This appliance is fitted with a Thermal Cut-Out safety feature. Should the temperature exceed safe levels, the appliance will automatically cut power.

The Safety Cut-out switch is located on the underside of the appliance. To reset the appliance:

1. Empty the appliance and allow to cool.
2. Press the reset button until it clicks.



**WARNING: Ensure the appliance has cooled down and is empty before resetting the switch, as it may need to be tipped slightly to gain access to the switch.**

3. The appliance is now reset and can be used as normal.

## Cleaning, Care & Maintenance



**Always turn off and disconnect the appliance from the power supply before cleaning.**

- Use soapy water and a damp cloth to clean the exterior of the appliance.
- Dry thoroughly after cleaning.

### Descaling

In hard water areas lime scale can build up within the appliance after prolonged use. A buildup of scale can reduce the efficiency of the appliance and cause damage to the element.

To descale the appliance follow the instructions provided with any suitable descaler.



- **Note: Always flush out the system thoroughly after descaling.**
- **Apuro recommend that this appliance is descaled every 3 months or more frequently in hard water areas.**

## Troubleshooting

Fault	Probable Cause	Solution
The appliance is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug and lead are damaged	Call Apuro agent or qualified Technician
	Fuse in the plug has blown	Replace the plug fuse
	Power supply	Check power supply
	Internal wiring fault	Call Apuro agent or qualified technician
The appliance turns on but does not make coffee	Limescale build up in Percolator tube	Descale appliance
The tap is leaking	The tap has become loose	Tighten the tap handle

## Technical Specifications

Model	Voltage	Power	Current	Capacity	Weight (Full)	Brewing Time when full (Approx.)	Dimensions w x d x h mm
<b>CN295-A</b>	220-240V 50/60Hz	1500W	6A	15 litres	20kg	60 minutes	510 x 362 x 287

## Electrical Wiring

The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed.



If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

## Compliance

The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.



APURO parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.



APURO products have been approved to carry the following symbol:



**All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of APURO.**

**Every effort is made to ensure all details are correct at the time of going to press, however, APURO reserve the right to change specifications without notice.**

# DECLARATION OF CONFORMITY

<b>Equipment Type</b>	<b>Coffee Percolator - 15Ltr (100cups)</b>
<b>Model</b>	<b>CN295-A</b>
<b>Legislation</b>	<b>Electrical Safety Electromagnetic Compatibility</b>
<b>Standards</b>	AS/NZS60335-1:2011 Inc A1-3 AS/NZS60335-2-75:2013 Inc A1 EN55014-1:2006 +A1:2009 +A2:2011 EN55014-2:2015 EN61000-3-2:2014 EN61000-3-3:2013
<b>Producer Name</b>	<b>Apuro</b>
<b>Producer Address</b>	<b>15 Badgally Road, Campbelltown, NSW 2560</b>

---

I, the undersigned, hereby declare that the equipment specified above conforms to the above Legislation and Standard(s).

<b>Date</b>	<b>27<sup>th</sup> June 2017</b>
<b>Signature</b>	
<b>Full Name</b>	<b>Ashley Hooper</b>
<b>Position</b>	<b>Technical &amp; Quality Manager/ Responsible Supplier</b>



CN295-A\_A5\_v1\_170628