



Economy Recirculating Glasswasher

MODEL: B42GN

- Recirculating wash for minimum water and energy use
- 3 Wash programs to match degree of soil
- Top mounted controls minimises bending
- Up to 1200 Glasses per hour
- Integrated detergent pump
- Durable stainless steel wash arms
- Easy to use electro mechanical controls
- Safety Cut-out fitted to door



FEATURES

BENEFITS

SUPPLIED WITH 400 x 400MM (14" x 14") GLASS RACK, WILL ACCEPT 435 x 435MM AND 430 x 360MM (17" x 14") RACKS	➔	UP TO 1200 ITEMS PER HOUR, 400 x 400MM RACKS CAN BE SUPPLIED WITH INDIVIDUAL COMPARTMENTS TO PROTECT TALL STEM GLASSWARE
EASILY REMOVABLE SPRAY ARMS AND FILTERS	➔	REDUCED CONTAMINATION OF WASH WATER WITH SOIL GIVES LOW DETERGENT CONSUMPTION
LOW ENERGY CONSUMPTION	➔	OPERATES FROM SINGLE PHASE 15 AMP ELECTRICAL SUPPLY
DETERGENT PUMP FITTED AS STANDARD	➔	INTEGRATED HOSE DROPS STRAIGHT INTO CHEMICALS
ALL STAINLESS STEEL CONSTRUCTION	➔	ENSURES RIGIDITY AND DURABILITY
SAFETY CUT-OUT FITTED TO DOOR	➔	ENSURES SAFE OPERATION



"The **ONLY** HACCP approved Warewashing made in Australia for your protection"



10 YEARS GUARANTEE OF PARTS AVAILABILITY
 6 YEARS WARRANTY ON STAINLESS BODY
 2 YEARS WARRANTY ON WASH PUMP
 1 YEAR WARRANTY ON PARTS & LABOUR



1800 013 123

goldsteineswood.com.au



Economy Recirculating Glasswasher

B42GN (400 x 400 Racks)

Suits all popular Wash Rack Sizes:

The large wash chamber has been designed to accept all popular wash rack sizes including: 400 x 400mm, 400 x 430mm as well as 430 x 360mm. A generous 295mm clear chamber height easily caters for tall stem glassware, jugs and plates. An impact resistant 400 x 400mm polypropylene rack is supplied as standard.

Optional polypropylene racks with customised individual compartments for high cost glassware are also available.

Fully Automatic Operation:

Simply select an appropriate wash cycle time and push "start" button. Your Eswood dishwasher will do the rest, from wash to final rinse, including detergent injection. Upper and lower rotating wash arms with multiple jets ensure maximum wash and rinse coverage. The boost heater is thermostatically controlled and interlocked to machine operation to ensure correct sanitising every time. The B42GN has an additional cold rinse cycle to cool glasses after sanitising.




Operator safety is assured as the machine cannot operate until the door is securely closed.

Designed and Built to Eswood's Quality Endorsed Standards:

Eswood dishwashers are Australian designed and manufactured to meet your needs. They comply with all the Australian Health and Plumbing Safety regulations. The long-life stainless steel body has an attractive and easy to clean satin finish. All internal components are manufactured from selected high durable materials to ensure outstanding service under constant commercial use.

Easy Installation:

Height adjustable legs eliminate the need for a plinth or sealing to the floor to meet health regulations. Just connect the inlet hoses to hot and cold taps, connect the outlet to a drain and plug the cord into a 15amp, 240V power outlet.

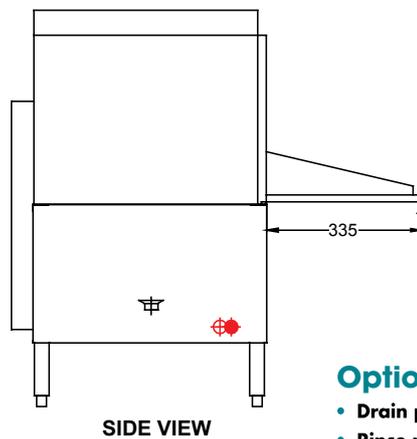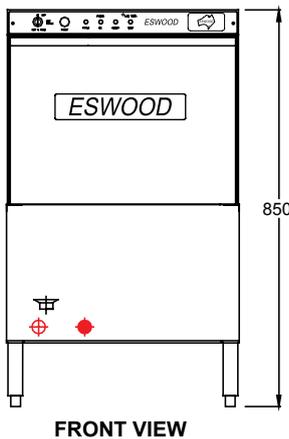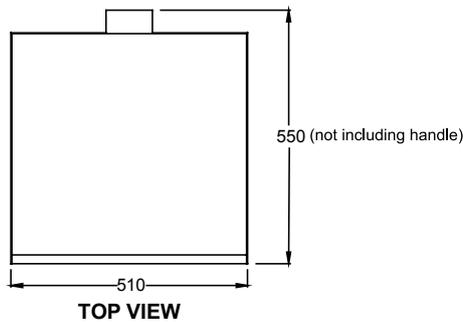

MODEL: B42GN Specifications:	
Dimensions (WxDxH):	510 x 550 x 850 mm
Depth with door open:	885 mm
Rack Size - R402 (WxD):	400 x 400
Weight:	50 kg
Electric Connection:	15A Single Phase - 240V
Rating:	3.3 kW
Water Supply:	65°C / 2-4 bar (28-56 psi)
Packed:	0.2 m ³
Service:	1200 glasses / Hour
Wash Cycle:	60 sec Hot 75 sec Hot & Cold 3 min Scrub
Water Consumption:	3L Hot 2.5L Hot & 3L Cold (optional)
Tank Capacity:	13L
Detergent Pump:	Fitted

- ⌵ Drain 2" BSP Gravity
- ◆ Hot water supply 3/4" BSP.
- ⊕ Cold water supply 3/4" BSP.

Options

- Drain pump: Required when gravity drain is not applicable.
- Rinse pump: Required when water pressure is below 28 psi.
- Thermometer: Required for accurate temperature reading.

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
211 - 217 Woodpark Rd SMITHFIELD NSW 2164
T: 1800 013 123 F: 02 96045420
E: sales@goldsteineswood.com.au



goldsteineswood.com.au

