

# TBR | TDR Models

BAR + DRAFT REFRIGERATION



TRUE REFRIGERATION | RAISING THE BAR



At True, we are continually seeking out environmentally friendly components and processes that will reduce our carbon footprint. This process encapsulates both our approach to manufacturing as well as our approach to the performance of our equipment.



## Table of Contents

### Meet the True Bar Line Up

- 1 Nomenclature
- 2 Features & Benefits

### Why True?

- 4 Hydrocarbon Refrigeration
- 5 RCU Technology
- 6 Made in the U.S.A.
- 7 ANSI/NSF 7
- 8 Customization
- 9 TruLumina® Lighting
- 10 Panel Ready Doors



### True Bar Refrigerators

- 14 TBR | Build Your True – Bar Refrigerator
- 18 TBR | Specifications – Reach-In
- 24 TBR | Specifications – Pass-Thru



### True Draft Refrigerators

- 28 TDR | Build Your True – Draft Refrigerator
- 32 TDR | Specifications – Reach-In
- 38 TDR | Specifications – Pass-Thru



### TBR | TDR Accessories

- 40 TBR | TDR | Accessories

### TBR | TDR Model Variations

- 43 TBR | TDR | Model Variations




True's extensive line of refrigerated bar equipment offers a diverse selection of products and sizes. With rugged construction, attractive appearance and oversized refrigeration systems, True's bar equipment is designed to meet and exceed the performance and reliability demands of bars and nightclubs. Models feature stainless steel tops with heavy duty, black powder coated, cold rolled steel (CRS); stainless exteriors are also available.


### TBR | TDR Series

32 | 36 | 48 | 52 | 60 | 72 | 84 | 92 | 108

**TBR** True Bar Refrigeration | **TDR** True Draft Refrigeration

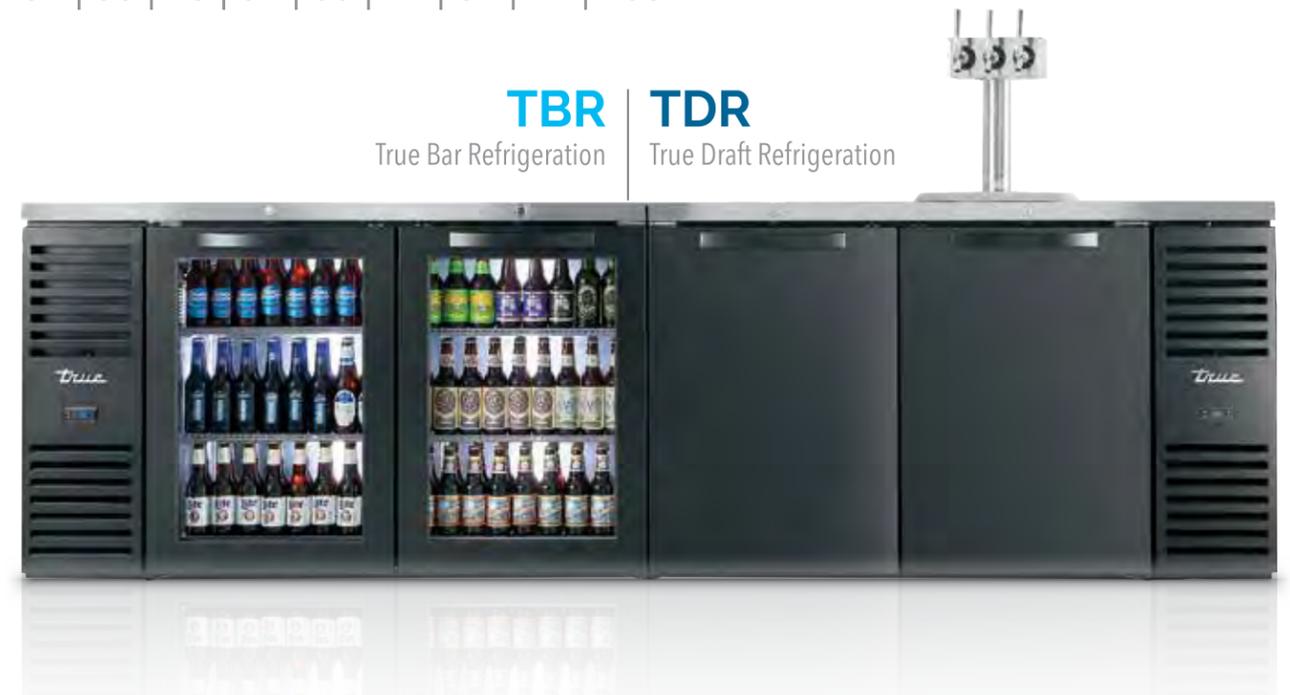

### TBR | TDR Nomenclature

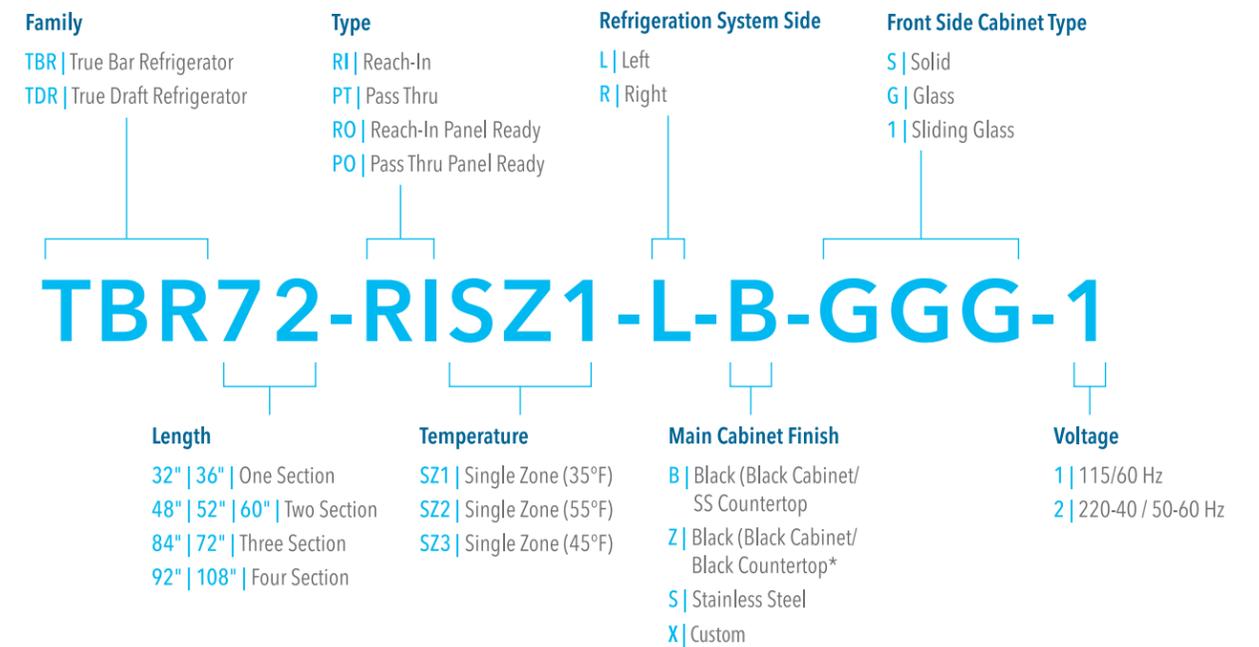

\*NOTE: Black countertops not offered on the 108" models.

**RCU | Reverse Condenser Fan Motor**

Reverse Condensing Technology allows for the reversing of the condensing fan motor, helping to keep the condensing coil clean and reduce the negative effects of a dirty coil.



Front Air Intake/  
Front Air Discharge

Electronic Control



TDR52-RISZ1-L-B-SG-1

**Climate-Friendly, Cost Effective**

Hydrocarbon (HC) refrigerants are natural, nontoxic refrigerants that have no ozone depleting properties and low global warming potential. Hydrocarbons are one of the most climate-friendly and cost-effective refrigerants to cool and freeze.

Approx.  
Energy Savings  
**20-25%**

**Cabinet Heights**

Multiple heights with a wide variety of castor and leg options.

Standard Height	1/4" H Leg Levelers	7/8" H Rollers	2" D Castors	3" D Castors	4" D Castors	5" D Castors	6" H Legs or Seismic Legs
34 11/16" H	34 15/16" H	35 9/16" H	37 9/16" H	38 9/16" H	39 3/4" H	40 3/4" H	40 11/16" H



**Model Options**

**Family**

TBR – True Bar Refrigerator  
32" | 36" | 48" | 52" | 60" | 72" | 84" | 92" | 108"  
TDR – True Draft Refrigerator  
32" | 36" | 48" | 52" | 60" | 72" | 84" | 92" | 108"

**Type**

Reach-In | Pass-Thru | Panel Ready

**Doors**

Solid Swing | Glass Swing | Glass Slide

**Hinging**

48" | 52" | 60" – Left/Right  
32" | 36" | 72" | 84" | 92" | 108"  
(Match System Side)

**Refrigeration System Side**

Left (standard)  
Right

**Temperature**

Single Zone (35°F)  
Single Zone (55°F)  
Single Zone (45°F)

**Voltages**

115/60 Hz (all models)  
220-240 / 50-60 Hz  
TBR: 48" | 52" | 60" | 72"  
TDR: 48" | 52"

**Exterior Finishes**

Black (standard)  
Stainless Steel  
Custom

**Interior Finish**

Stainless Steel  
Black Powder Coated Stainless Steel

**Lighting**

TruLumina®

**Shelving**

Gray Wire (standard)  
Gray Wire Cutout  
Black Wire  
Black Wire Cutout

Your Energy Efficient Future...Naturally®

# WHAT IS HYDROCARBON REFRIGERANT?

Hydrocarbon (HC) refrigerants are natural, nontoxic refrigerants that have no ozone depleting properties and low global warming potential. Hydrocarbons are one of the most climate-friendly and cost-effective refrigerants to cool and freeze.

R290 (HC) refrigerant is highly refined propane that is a safe, environmentally friendly replacement for the hydrofluorocarbon (HFC) refrigerants R134a in refrigerator applications and R404a in freezer applications.

### Why is Hydrocarbon Refrigerant Better?


- Current HFC Refrigerants (R134a and R404a) have extremely high Global Warming Potential (GWP) that is harmful to the environment. GWP is the relative measure of how much heat a greenhouse gas traps in the atmosphere. The lower the GWP the better a substance is for the environment. By comparison, R290 Hydrocarbon has a very minimal GWP.
- R290's thermodynamic properties are superior to both R134a and R404a. R290's heat capacitance is approximately 90% greater than R134a and 140% greater than R404a with lower viscosity. This means that the R290 can absorb more heat, faster, resulting in quicker temperature recovery and lower energy consumption.

### Global Warming Potential of Refrigerants



Natural Refrigerant® logo is a registered trademark of True Manufacturing.

## Reverse Condensing Fan Motor

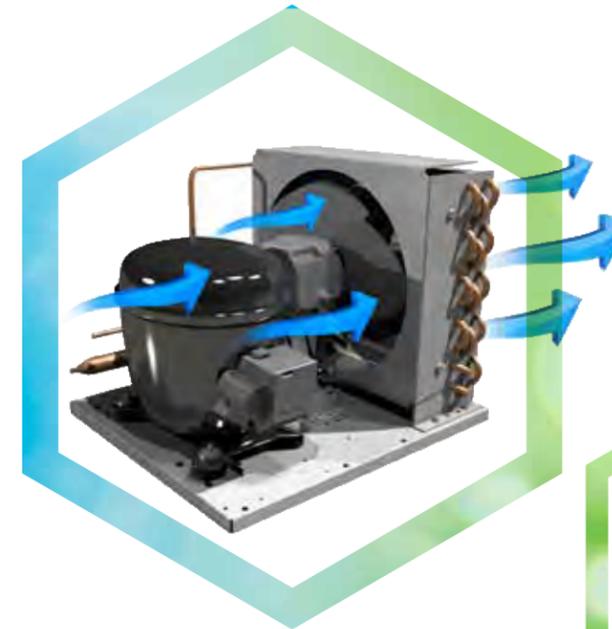

**RCU TECHNOLOGY**  
STANDARD IN ALL TRUE TBR | TDR MODELS

**20% LESS ENERGY CONSUMPTION**

**INCREASED LIFE SPAN**



**COLDEST TEMPS FRESHEST PRODUCTS**

### RCU technology allows for the reversal of the direction of the condensing fan motor.

- Upon each compressor start up, the fan motor will reverse direction for twenty seconds, to help blow off excess dust, dirt, and debris from the condensing coil.
- A clean condensing coil can help reduce energy consumption by as much as 20%.
- Reduced compressor run times lead to not only a longer life span for the compressor but the fan motors as well.
- A clean coil also goes a long way in maintaining better product temperature.

While a Reverse Condensing Fan Motor does not replace the need for preventative maintenance, it will greatly increase the life span of your True cooler as well as help you maintain the coldest temperatures and the freshest products possible.

True is committed to producing high quality products that are manufactured in the USA. True manufactures each cabinet using an industry leading combination of high quality metals and components designed to optimize cabinet performance.

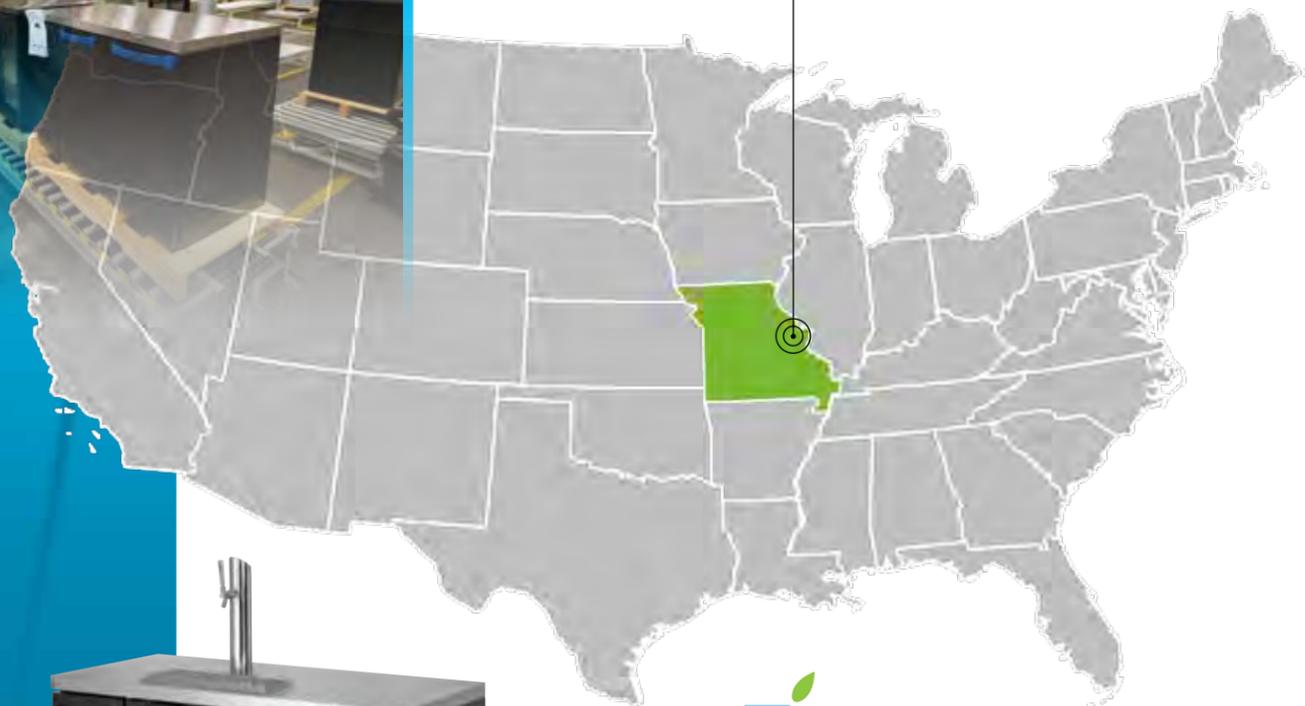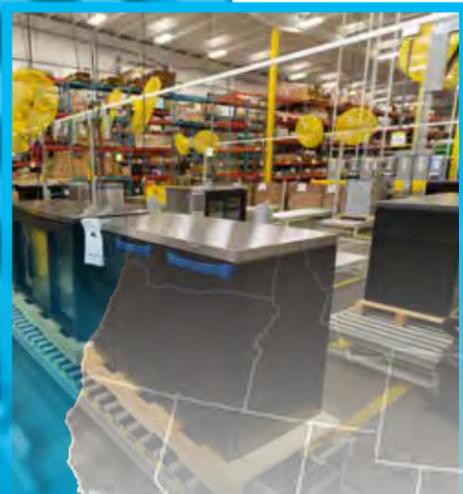

**RATED FOR OPEN FOOD PRODUCT**  
Every True TBR bar refrigerator is ANSI/NSF 7 Standard approved for open food storage.



permanent | protective | decorative | colorful

Accentuate your bar or café with True's offering of custom powder coat finishes and hardware options. What was once a black or stainless fixture can now become a custom focal point to your bar. Choose from a wide variety of powder coat color options as well as 4 different hardware finishes.

**Color** Contact factory for additional available colors.

White	RAL 9001 Cream	RAL 1013 Oyster White	RAL 1001 Beige	RAL 7035 Light Grey	RAL 7001 Silver Grey	RAL 7023 Concrete Grey	RAL 7024 Graphite Grey
RAL 8001 Ochre Brown	RAL 8007 Fawn Brown	RAL 3011 Brown Red	RAL 8016 Mahogany Brown	RAL 6018 Yellow Green	RAL 6013 Reed Green	RAL 6010 Grass Green	RAL 6001 Moss Green
RAL 1028 Melon Yellow	RAL 2009 Traffic Orange	RAL 3020 Traffic Red	RAL 5024 Pastel Blue	RAL 5010 Gentian Blue	RAL 5009 Azure Blue	Black	Ultra Black Matte

**Hardware** Custom hardware finishes available for handles and logo.

Chrome	Gold (Polished)	Brass (Polished)	Pewter
--------	-----------------	------------------	--------



TruLumina.

**TruLumina® for a True Impact**

True's line of bar equipment comes with 14-color TruLumina lighting. This industry leading lighting package allows bars to choose team colors or celebrate festive holidays with the click of a button, adding customization to their decor/ environment and building their brand image.





**14 Color Options**




### Match your style and decor!

True's line of refrigerated bar equipment now offers the option of Panel Ready Doors\* which allow you to enhance any bar with a custom look to match your cabinetry. Your cabinet will come without finished front panels but ready for custom after-market panel installation to further customize the look and style of your equipment.

Detailed drawings and measurements are provided in the cabinet installation manuals. Available on all TBR and TDR models.

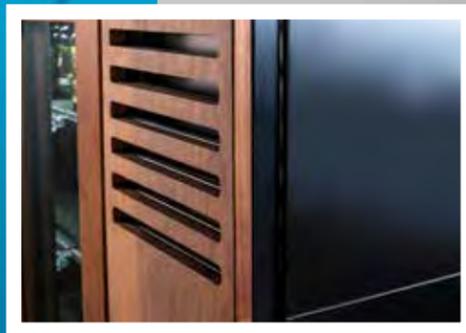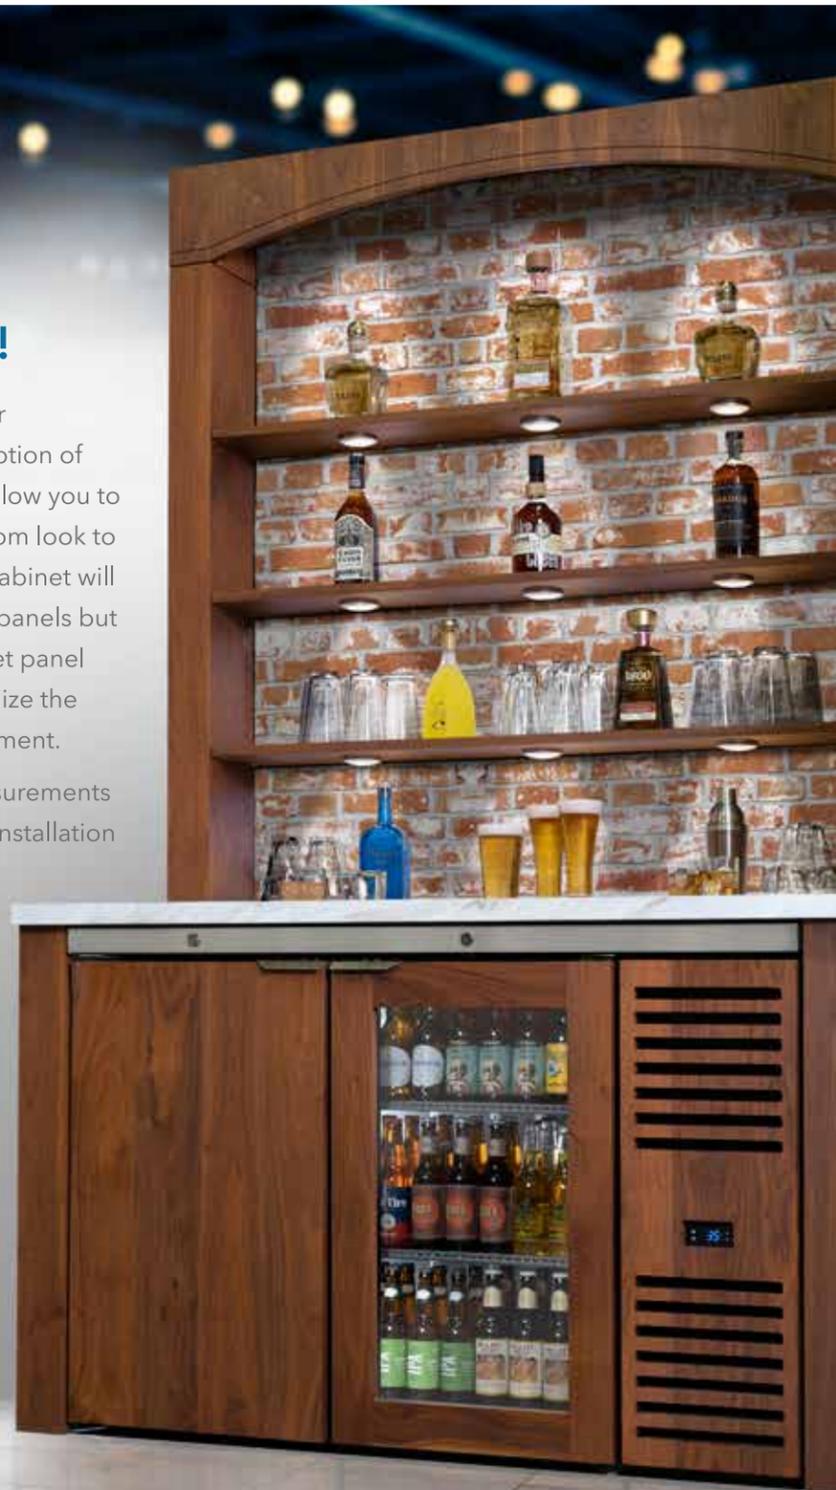

\*Custom overlay panels not sold by True. Cabinet ships ready for custom panel installation. (See black cabinet, top right).

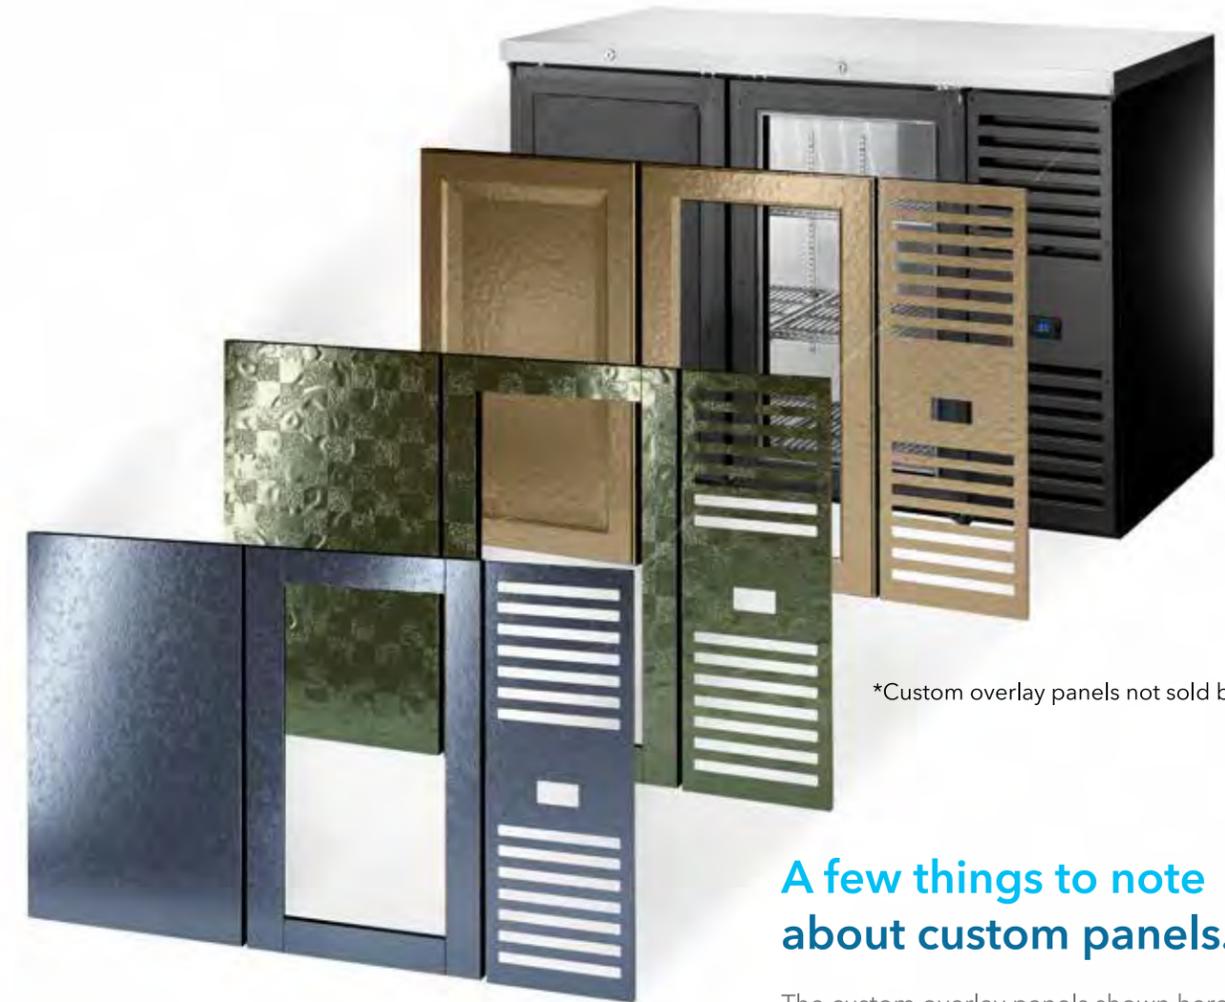

\*Custom overlay panels not sold by True.

### A few things to note about custom panels...

The custom overlay panels shown here are meant to inspire possible style and color options for your business application and do not represent actual panels for sale.

True does not manufacture these panels but provides detailed drawings and measurements in the install manuals of these cabinets to provide to aftermarket vendors for production.

When ordering your cabinets, please note that they will ship without finished panels in place. (See black cabinet shown above).





## TRUE BAR REFRIGERATORS

True's line of back bar refrigerators, TBR's, offers multiple options to choose from. Whether its temperature range, door type or lighting color, True Bar Refrigerators can be customized to fit the functionality and style of your bar.



**1** CHOOSE Your Voltage

- 115/60 Hz
- 220-240 / 50-60 Hz



**2** CHOOSE Your Temperature

- Single Zone - 35° F (standard)
- Single Zone - 55° F (red wine)
- Single Zone - 45° F (white wine)



**7** CHOOSE Your Back Finish

- Galvanized Steel (standard)
- Stainless Steel



**8** INTERIOR Lighting

- 14 Color TruLumina® LED Lighting standard on glass door units, white LED standard on solid door units.



**3** CHOOSE Your Refrigeration System Side Location

- Left (standard)
- Right



**4** CHOOSE Your Countertop Finish

- Stainless Steel
- Black Powder Coated Stainless Steel



**9** CHOOSE Your Shelving

- Gray PVC Coated Wire Shelves (standard)
- Black PVC Coated Wire Shelves



- Gray PVC Coated Cutout Shelves
- Black PVC Coated Cutout Shelves



**5** CHOOSE Your Cabinet Exterior

- Black (standard)
- Stainless Steel
- 300 Series Stainless Steel
- Custom Powder Coated Color



**6** CHOOSE Your Cabinet Interior

- Stainless Steel
- Black Powder Coated Stainless Steel



**10** CHOOSE Your Mounting Options

- Leg Levelers (standard)
- Legs (2 options)
- Castors (5 options)



**11** CHOOSE Your Door Options

- Black Powder Coated Solid Door (standard)
- Stainless Steel Solid Door
- Glass Door with Black Powder Coated Frame
- Glass Door with Stainless Steel Frame
- Left or Right Door Hinge



12

**CHOOSE Panel Ready Door Option\***

True's line of refrigerated bar equipment now offers the option of Panel Ready Doors\* which allow you to enhance any bar with a custom look to match your cabinetry. Your cabinet will come without finished front panels but ready for custom after-market panel installation to further customize the look and style of your equipment.

Detailed drawings and measurements are provided in the cabinet installation manuals. Available on all TBR and TDR models.

**\*NOTE:** Custom overlay panels not sold by True. Cabinet ships ready for custom panel installation.



16

### TBR32-RISZ1



TBR32-RISZ1-L-B-S-1

Cabinet Exterior Dimensions	W	D †	H*
	32"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can	12oz. bottle	
	38 – 6-packs	21 – 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	1		
Shelves	3		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR36-RISZ1



TBR36-RISZ1-L-B-S-1

Cabinet Exterior Dimensions	W	D †	H*
	36"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can	12oz. bottle	
	44 - 6-packs	27 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	1		
Shelves	3		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR48-RISZ1



TBR48-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	48"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can	12oz. bottle	
	76 - 6-packs	43 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	2		
Shelves	6		
Options	<ul style="list-style-type: none"> <li>• Glass swing doors</li> <li>• Glass slide doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR52-RISZ1



TBR52-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	52"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can	12oz. bottle	
	78 - 6-packs	49 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	2		
Shelves	6		
Options	<ul style="list-style-type: none"> <li>• Glass swing doors</li> <li>• Glass slide doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			



### TBR60-RISZ1



TBR60-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	60"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can		12oz. bottle
	101 - 6-packs		63 - 6-packs
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	2		
Shelves	6		
Options	<ul style="list-style-type: none"> <li>• Glass swing doors</li> <li>• Glass slide doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR72-RISZ1



TBR72-RISZ1-L-B-SSS-1

Cabinet Exterior Dimensions	W	D †	H*
	72"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can		12oz. bottle
	125 - 6-packs		78 - 6-packs
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	3		
Shelves	9		
Options	<ul style="list-style-type: none"> <li>• Glass swing doors</li> <li>• Glass slide doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR84-RISZ1



TBR84-RISZ1-L-B-SSS-1

Cabinet Exterior Dimensions	W	D †	H*
	84"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can		12oz. bottle
	164 - 6-packs		96 - 6-packs
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	3		
Shelves	9		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR92-RISZ1



TBR92-RISZ1-L-B-SSSS-1

Cabinet Exterior Dimensions	W	D †	H*
	92"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can		12oz. bottle
	182 - 6-packs		108 - 6-packs
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	4		
Shelves	12		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			



### TBR108-RISZ1



TBR108-RISZ1-L-B-SSSS-1

Cabinet Exterior Dimensions	W	D †	H*
	108"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	12oz. can	12oz. bottle	
	220 - 6-packs	132 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	4		
Shelves	12		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 1/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
<p>† Depth does not include 1 1/2" for door handles.                  * Height does not include 1/4" for leg levelers.</p>			



**NOTE:** All TBR's are available in a Stainless Steel exterior.

### TBR36-PTSZ1



TBR36-PTSZ1-L-B-S-S-1

Cabinet Exterior Dimensions	W	D †	H*
	36"	27"	34¾"
Capacity	12oz. can	12oz. bottle	
	38 - 6-packs	25 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	2		
Shelves	3		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR60-PTSZ1



TBR60-PTSZ1-L-B-SS-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	60"	27"	34¾"
Capacity	12oz. can	12oz. bottle	
	89 - 6-packs	57 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	4		
Shelves	6		
Options	<ul style="list-style-type: none"> <li>• Glass swing doors</li> <li>• Glass slide doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### TBR84-PTSZ1



TBR84-PTSZ1-L-B-SSS-SSS-1

Cabinet Exterior Dimensions	W	D †	H*
	84"	27"	34¾"
Capacity	12oz. can	12oz. bottle	
	164 - 6-packs	88 - 6-packs	
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	6		
Shelves	9		
Options	<ul style="list-style-type: none"> <li>• Glass swing door</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 1/4" for leg levelers.			

### Model Variations




Standard | Solid Swing Door



Option | Glass Swing Door



Option | Glass Slide Door

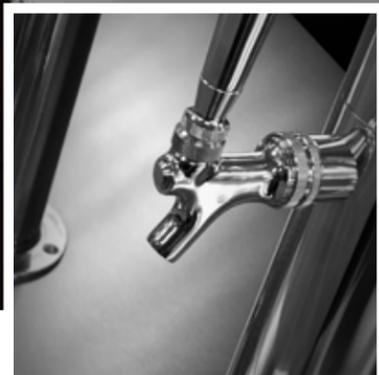

## TRUE DRAFT REFRIGERATORS

True's line of draft refrigerators, TDR's, offers multiple options to choose from. Whether it's draft towers, exterior color or door type, True Draft Refrigerators can be customized to fit the functionality and style of your bar.



**1** CHOOSE Your Voltage

- 115/60 Hz
- 220-240 / 50-60 Hz



**2** CHOOSE Your Temperature

- Single Zone - 35° F (standard)
- Single Zone - 55° F (red wine)
- Single Zone - 45° F (white wine)



**7** CHOOSE Your Back Finish

- Galvanized Steel (standard)
- Stainless Steel



**8** INTERIOR Lighting

- 14 Color TruLumina® LED Lighting standard on glass door units, white LED standard on solid door units.



**3** CHOOSE Your Refrigeration System Side Location

- Left (standard)
- Right



**4** CHOOSE Your Countertop Finish

- Stainless Steel
- Black Powder Coated Stainless Steel



**9** CHOOSE Your Shelving

- Gray PVC Coated Wire Shelves (standard)
- Black PVC Coated Wire Shelves



- Gray PVC Coated Cutout Shelves
- Black PVC Coated Cutout Shelves



**5** CHOOSE Your Cabinet Exterior

- Black (standard)
- Stainless Steel
- 300 Series Stainless Steel
- Custom Powder Coated Color



**6** CHOOSE Your Cabinet Interior

- Stainless Steel
- Black Powder Coated Stainless Steel



**10** CHOOSE Your Mounting Options

- Leg Levelers (standard)
- Legs (2 options)
- Castors (5 options)



**11** CHOOSE Your Draft Arm Dispensing Kit

- No Draft Column (standard)
- No Draft Column (pre-drilled holes)
- Draft Arm (3 options)
- T-Tower (2 options)



12

**CHOOSE Your Door Options**

- Black Powder Coated Solid Door (standard)
- Stainless Steel Solid Door
- Glass Door with Black Powder Coated Frame
- Glass Door with Stainless Steel Frame
- Left or Right Door Hinge



13

**CHOOSE Panel Ready Door Option\***

True's line of refrigerated bar equipment now offers the option of Panel Ready Doors\* which allow you to enhance any bar with a custom look to match your cabinetry. Your cabinet will come without finished front panels but ready for custom after-market panel installation to further customize the look and style of your equipment.

Detailed drawings and measurements are provided in the cabinet installation manuals. Available on all TBR and TDR models.

**\*NOTE:** Custom overlay panels not sold by True. Cabinet ships ready for custom panel installation.

30



Check out True's selection of wine merchandisers



### TDR32-RISZ1



TDR32-RISZ1-L-B-S-1

Cabinet Exterior Dimensions	W	D †	H*
	32"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	2		1
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	1		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR36-RISZ1



TDR36-RISZ1-L-B-S-1


Cabinet Exterior Dimensions	W	D †	H*
	36"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	4		1
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	1		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR48-RISZ1



TDR48-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	48"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	6		1
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	2		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Combo solid &amp; glass swing doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

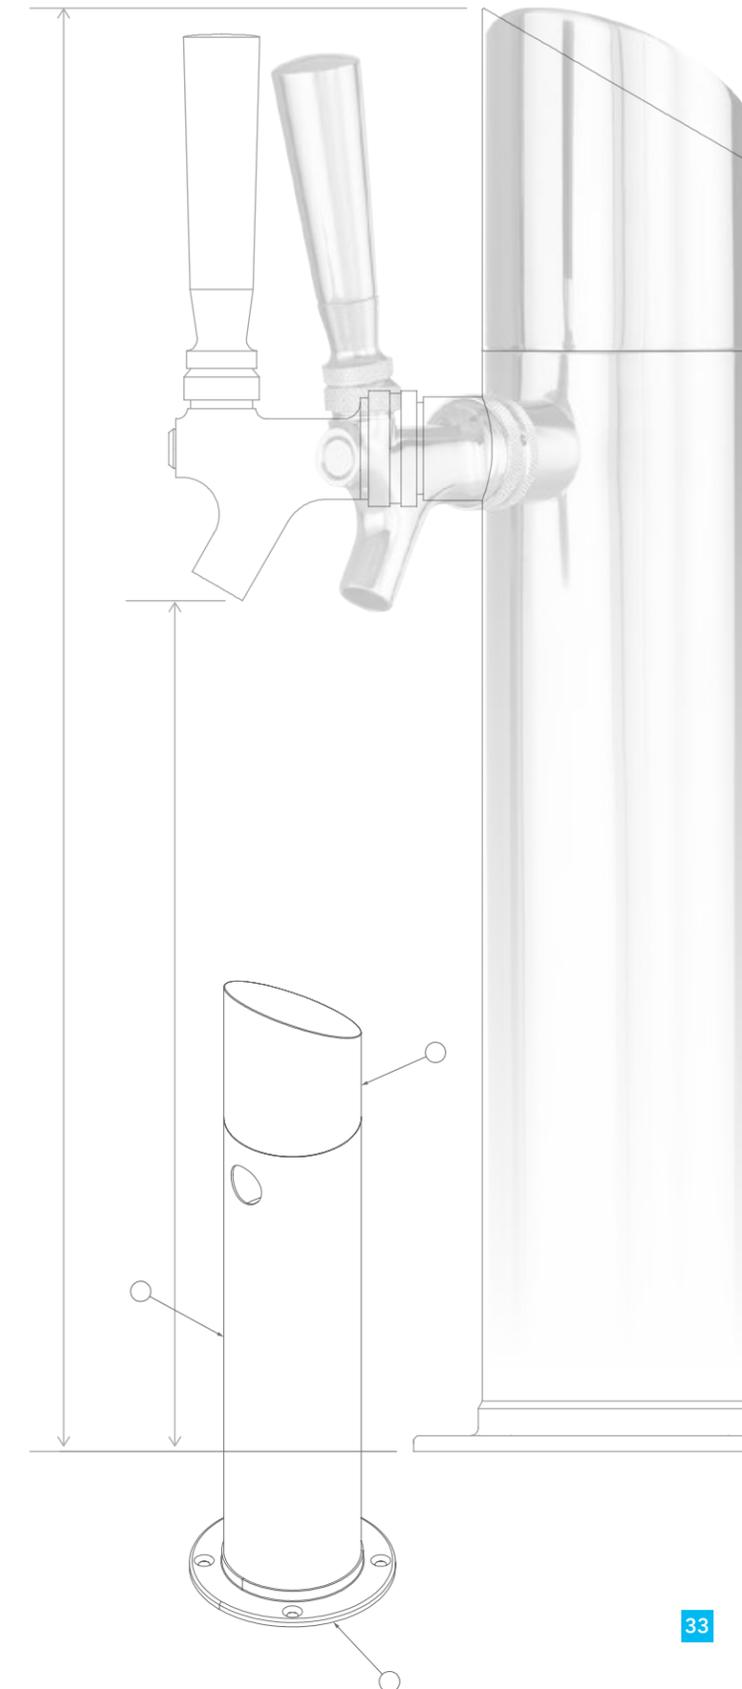

**NOTE:** All TDR's are available in a Stainless Steel exterior.

**NOTE:** All TDR's are available in a Stainless Steel exterior.

### TDR52-RISZ1



TDR52-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	52"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	7		2
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	2		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Combo solid &amp; glass swing doors</li> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR60-RISZ1



TDR60-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	60"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	8		2
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	2		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR72-RISZ1



TDR72-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	72"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	11		3
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	3		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR84-RISZ1



TDR84-RISZ1-L-B-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	84"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	14		4
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	3		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

**NOTE:** All TDR's are available in a Stainless Steel exterior.

**NOTE:** All TDR's are available in a Stainless Steel exterior.

### TDR92-RISZ1



TDR92-RISZ1-L-B-SSSS-1

Cabinet Exterior Dimensions	W	D †	H*
	92"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	16		4
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	4		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR108-RISZ1



TDR108-RISZ1-L-B-SSSS-1

Cabinet Exterior Dimensions	W	D †	H*
	108"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	19		5
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	4		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			



**NOTE:** All TDR's are available in a Stainless Steel exterior.

### TDR36-PTSZ1



TDR36-PTSZ1-L-B-S-S-1

Cabinet Exterior Dimensions	W	D †	H*
	36"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	4		1
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/5	1.8	5-15P
Doors	1		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR60-PTSZ1



TDR60-PTSZ1-L-B-SS-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	60"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	8		2
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	2		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### TDR84-PTSZ1



TDR84-PTSZ1-L-B-SS-SS-SS-1

Cabinet Exterior Dimensions	W	D †	H*
	84"	24 <sup>7</sup> / <sub>8</sub> "	34 <sup>3</sup> / <sub>4</sub> "
Capacity	1/6 Barrels		1/2 Barrels
	14		4
Temperature	33°F - 38°F (.5°C - 3.3°C)		
Voltage	HP	Amps	NEMA
	1/4	3.2	5-15P
Doors	3		
Shelves	0		
Options	<ul style="list-style-type: none"> <li>• Right side compressor</li> <li>• Alternative temperature zones available (contact factory)</li> <li>• Optional draft towers available (contact factory)</li> <li>• Castors: 7/8" rollers, 2", 3", 4", 5" castors</li> <li>• 6" legs</li> <li>• 6" seismic legs</li> </ul>		
† Depth does not include 1 1/2" for door handles. * Height does not include 15 3/4" for draft tower. Height does not include 1/4" for leg levelers.			

### Model Variations



Standard | Solid Swing Door



Option | Solid & Glass Combo

### Draft Columns\*



**SINGLE ROUND**

- Beer
- Wine
- Cold Brew Coffee



**DOUBLE ROUND**

- Beer
- Wine
- Cold Brew Coffee



**TRIPLE ROUND**

- Beer



**T-STYLE TRIPLE**

- Beer



**SINGLE NITRO**

- Nitro Coffee



**DOUBLE NITRO**

- Nitro Coffee



**NITRO/COLD BREW COMBO**

- Nitro Coffee
- Cold Brew Coffee



**T-STYLE QUAD**

- Beer

\*NOTE: All draft columns come with appropriate installation hardware. See Tapping Options brochure for details.

### Manifolds



**2-WAY MANIFOLD**



**3-WAY MANIFOLD**




**4-WAY MANIFOLD**

### Spill Pan & Grate



15" standard on cabinet. 7", 11", 19", 23", 27", 31", and 35" are also available.

### Access Ports



### Draft Column Hole Cover




### Ratchet Lock



Only available for glass slide door models.

### CO2 Pressure Regulator

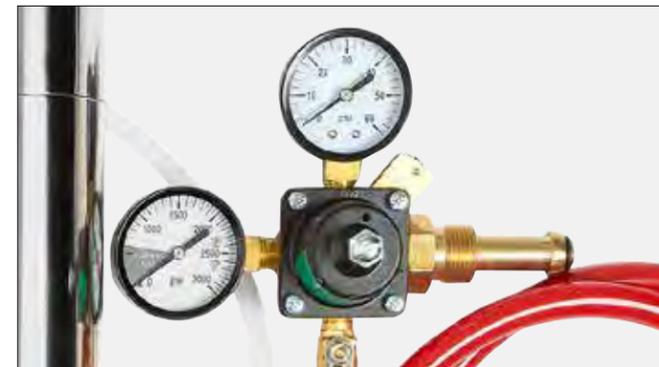

### Drain Bottle & Hanger Bracket



### Castor & Leg Options

Standard Height	1/4" H Leg Levelers*	7/8" H Rollers	2" D Castors	3" D Castors	4" D Castors	5" D Castors	6" H Legs or Seismic Legs
34 11/16" H	34 15/16" H	34 9/16" H	37 9/16" H	38 9/16" H	39 3/4" H	40 3/4" H	40 11/16" H


\* 1/4" leg levelers included standard on cabinets.

### Shelving Options




#### GRAY WIRE SHELVES

Black also available. Lead-time applies.

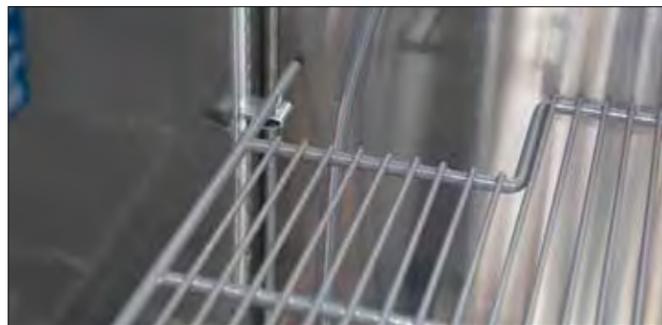

#### GRAY CUTOUT WIRE SHELVES

Black also available. Lead-time applies.

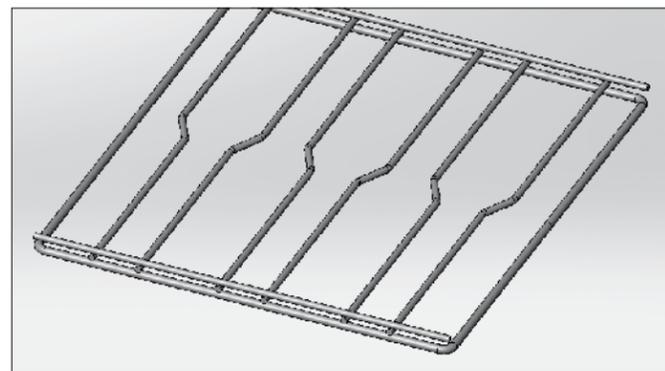

#### WINE SHELVES (Coming Soon)

Black also available. Lead-time applies.



#### BOTTLE ORGANIZERS

Black also available. Lead-time applies.

### True Bar Refrigeration (TBR)

	32	36	48	52	60	72	84	92	108
Sections	1	1	2	2	2	3	3	4	4
Reach-in Refrigerator Swing Door	•	•	•	•	•	•	•	•	•
Reach-in Refrigerator Slide door			•	•	•	•			
Pass-Thru Refrigerator Swing Door		•			•		•		
Pass-Thru Refrigerator Slide Door					•				

### True Draft Refrigeration (TDR)

	32	36	48	52	60	72	84	92	108
Sections	1	1	2	2	2	3	3	4	4
Reach-in Refrigerator Swing Door	•	•	•	•	•	•	•	•	•
Reach-in Refrigerator Slide door			•	•	•	•			
Pass-Thru Refrigerator Swing Door		•			•		•		
Pass-Thru Refrigerator Slide Door					•				

TRUE REFRIGERATION | RAISING THE BAR







**True Manufacturing Co., Inc.**

2001 East Terra Lane | O'Fallon, MO 63366-4434

t 636.240.2400 | toll free 800.325.6152

f 636.272.2408 | parts fax 636.272-9471

website [truemfg.com](http://truemfg.com)



[truemfg.com](http://truemfg.com)

