




**Nugget** ice is generated through a vertical cylinder, with an internal turning auger which scrapes the ice from the internal surface of the evaporator, lifting it up an ice extruder which compresses the ice shavings into a cylinder.

High production modular nugget ice maker.  
Up to 425kg production per 24/hr of nugget ice.  
Head only.  
Stainless steel cabinet.  
Complete with water & drain hoses.  
15 AMPS, 2kw power supply.




## ICE PRODUCTION

### Air Cooled Unit

Air Temp.	 Water Temperature			
	32°	21°	15°	10°
°C	90°	70°	60°	50°
10°	410	440	455	470
50°	904	970	1003	1036
21°	380	410	425	440
70°	838	904	937	970
32°	330	360	375	390
90°	728	794	827	860
38°	300	330	345	360
100°	661	728	760	794

## CUBE TYPE



**1g**

**NUGGET ICE**

11 mm Ø x 13 mm H

**8%** residual water content

Nugget ice is both compact and chewable. It's the ideal ice for cocktails like caipirinha, mojito and caipiroska. It's easy to measure like flake ice but it's much less wet

### SUGGESTED STORAGE BIN



BH122+KBT25  
Stainless steel  
storage bin.  
406kg capacity.

### DIMENSIONS

W x D x H (mm)  
538 x 663 x 790





### OPERATING REQUIREMENTS












220-240/50/1






R404a GWP=3922

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)

## SPECIFICATIONS

								
	cond	comp. W	ABS. W	Fuse	kWh/100kg	L / hr	kg	lbs
<b>NU470S A</b>		5030	2000	16	12	15	94	207
							103	227

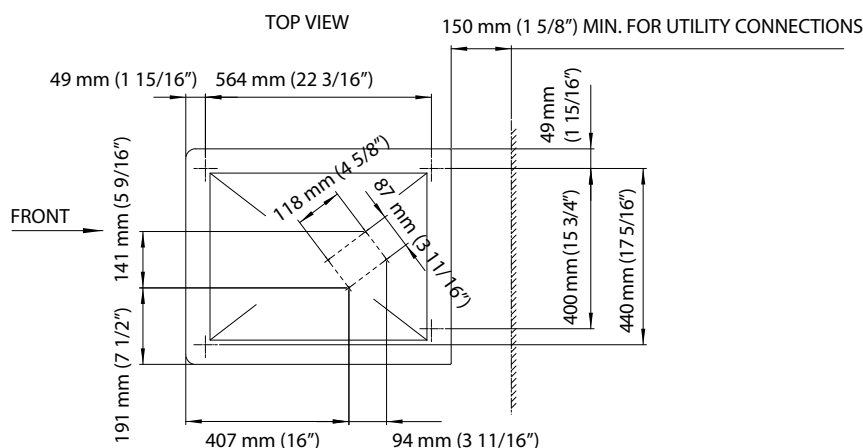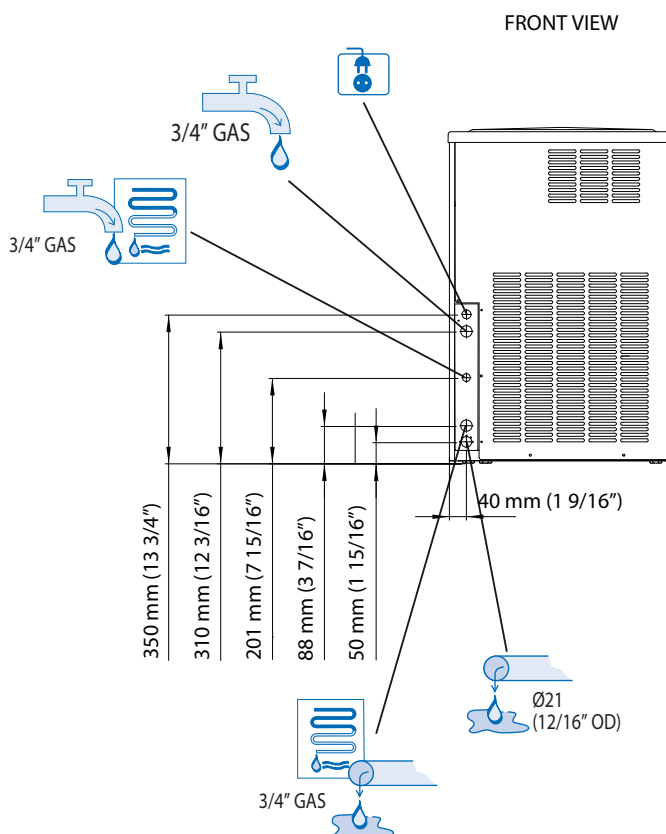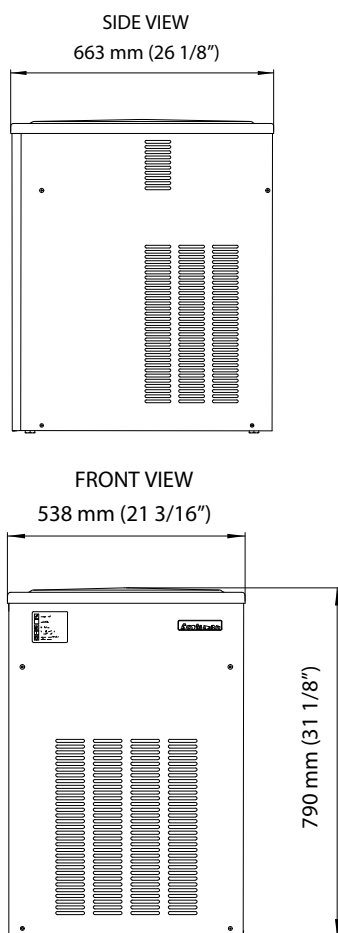

**NOTE:**  
IF THE UNIT IS INSTALLED AS A BUILT-IN/UNDERCOUNTER,  
BETWEEN 5 AND 10 mm ON EACH SIDE MUST BE CONSIDERED  
TO ALLOW FOR EASE OF INSTALLATION