


PRODUCT ADVANTAGES

- Drain heat recovery transfers heat from hot drain water to the freshwater supply, reducing boiler power consumption and saving up to 36 % of costs.
- Electronic control with digital temperature indication and 3 programmes for easy operation.
- Exhaust energy storage: the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW and less humidity in the kitchen area.
- GENIUS-X fine filter system: ensures the best wash result and saves energy and detergent costs.
- CLIP-IN wash and rinse arms: wash and rinse arms can be removed without any tools.
- Double-walled housing: the hood is double-walled, soundproof and heat-insulated.
- Thermostop function: automatic cycle time control to achieve hygienic rinsing temperatures.
- Optional refill signal: monitors contents of external chemical containers at any time. The control indicates well in advance when detergent and rinse aid need refilling.
- EASY-CLEAN concept: blue markings in the machine help the operator to identify the components which require cleaning
- Thermolabel 71 °C: default temperatures setting acc. European DIN can be switched by operator to a higher thermolable setting.
- Watermark approved
- Made in Germany

TECHNICAL DATA

Cycle times*	60 / 90 / 180 sec. and self-cleaning programme
Water consumption	2.0 l/rack
Tank capacity	23 l
Tank heating	2.5 kW
Power supply	415 / 50 / 3N
Booster loading	
Standard	6.2 kW
Total loading	
Standard	7.1 kW 3 x 15 A
Wash pump	0.7 kW
Rack size	500 x 500 mm
Loading height	440 mm
Noise level	63 dB (A)
Weight (gross/net)	140 / 120 kg

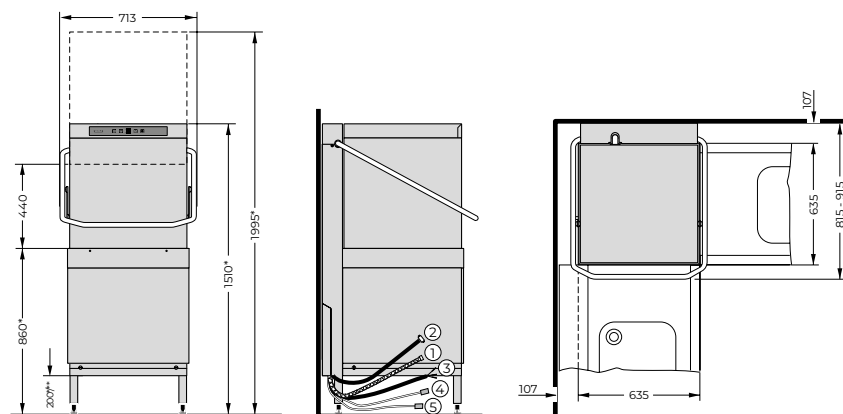
* The machine is equipped with an automatic programme time extension which ensures hygienic rinse temperatures, even on a cold-water supply.

At corner installation, we recommend that the right side of the machine is accessible for service.

If water hardness should exceed 3°dH we recommend a HOBART water treatment system (please refer to HOBART Export price list 2022, chapter 1.6).

CONNECTIONS

(1) Drain hose	2,000 mm ID 20 / AD 25
(2) Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply temperature	60 °C
(3) Connection cable	2,500 mm
Supply hose for	
(4) Detergent	2,000 mm
(5) Rinse aid	2,000 mm

DRAWING


* 25 mm adjustable feet
** 137 mm with heat recovery

