

A70 BTV

490L one door refrigerated cabinet -25 / -15°C

functions

Temperature range	-25 / -15°C
Energy label	F
Climatic class	4

technical data


Width (mm)	700
Depth (mm)	830
Height (mm)	2080
Weight (kg)	117
Opening door depth 90° (mm)	1460
Capacity (L)	490
Distance between runners (mm)	55
N° trays 2/1GN (535x650) or 600x800	24
Electric connection (V/~ /Hz)	230/1/50
Electric power (W)	850
Max. absorbed current (A)	3.8
Cooling power (W)	560
Consumption (kWh/kg) ISO16825 (W24h)	10.11
Internal width (mm)	550
Internal depth (mm)	710
Internal height (mm)	1480
Gross weight (kg)	149
Refrigerant type (gas)	R452A



main features

- Stainless steel inside and outside.
- Moulded guide supports.
- 83 mm side insulation with CFC-free polyurethane.
- Openable instrument panel for easier periodic maintenance (condenser cleaning).
- Touch screen control.
- Cell interior with rounded corners for easy cleaning.
- 150 mm steel feet with adjustable height.
- Automatic defrosting with heater and dissipation of condensed water with hot gas.
- Self-locking hinged doors.
- Light and lock fitted as standard.
- Suitable to be placed on plinth.
- External single-block buffer unit with forced top down ventilation.



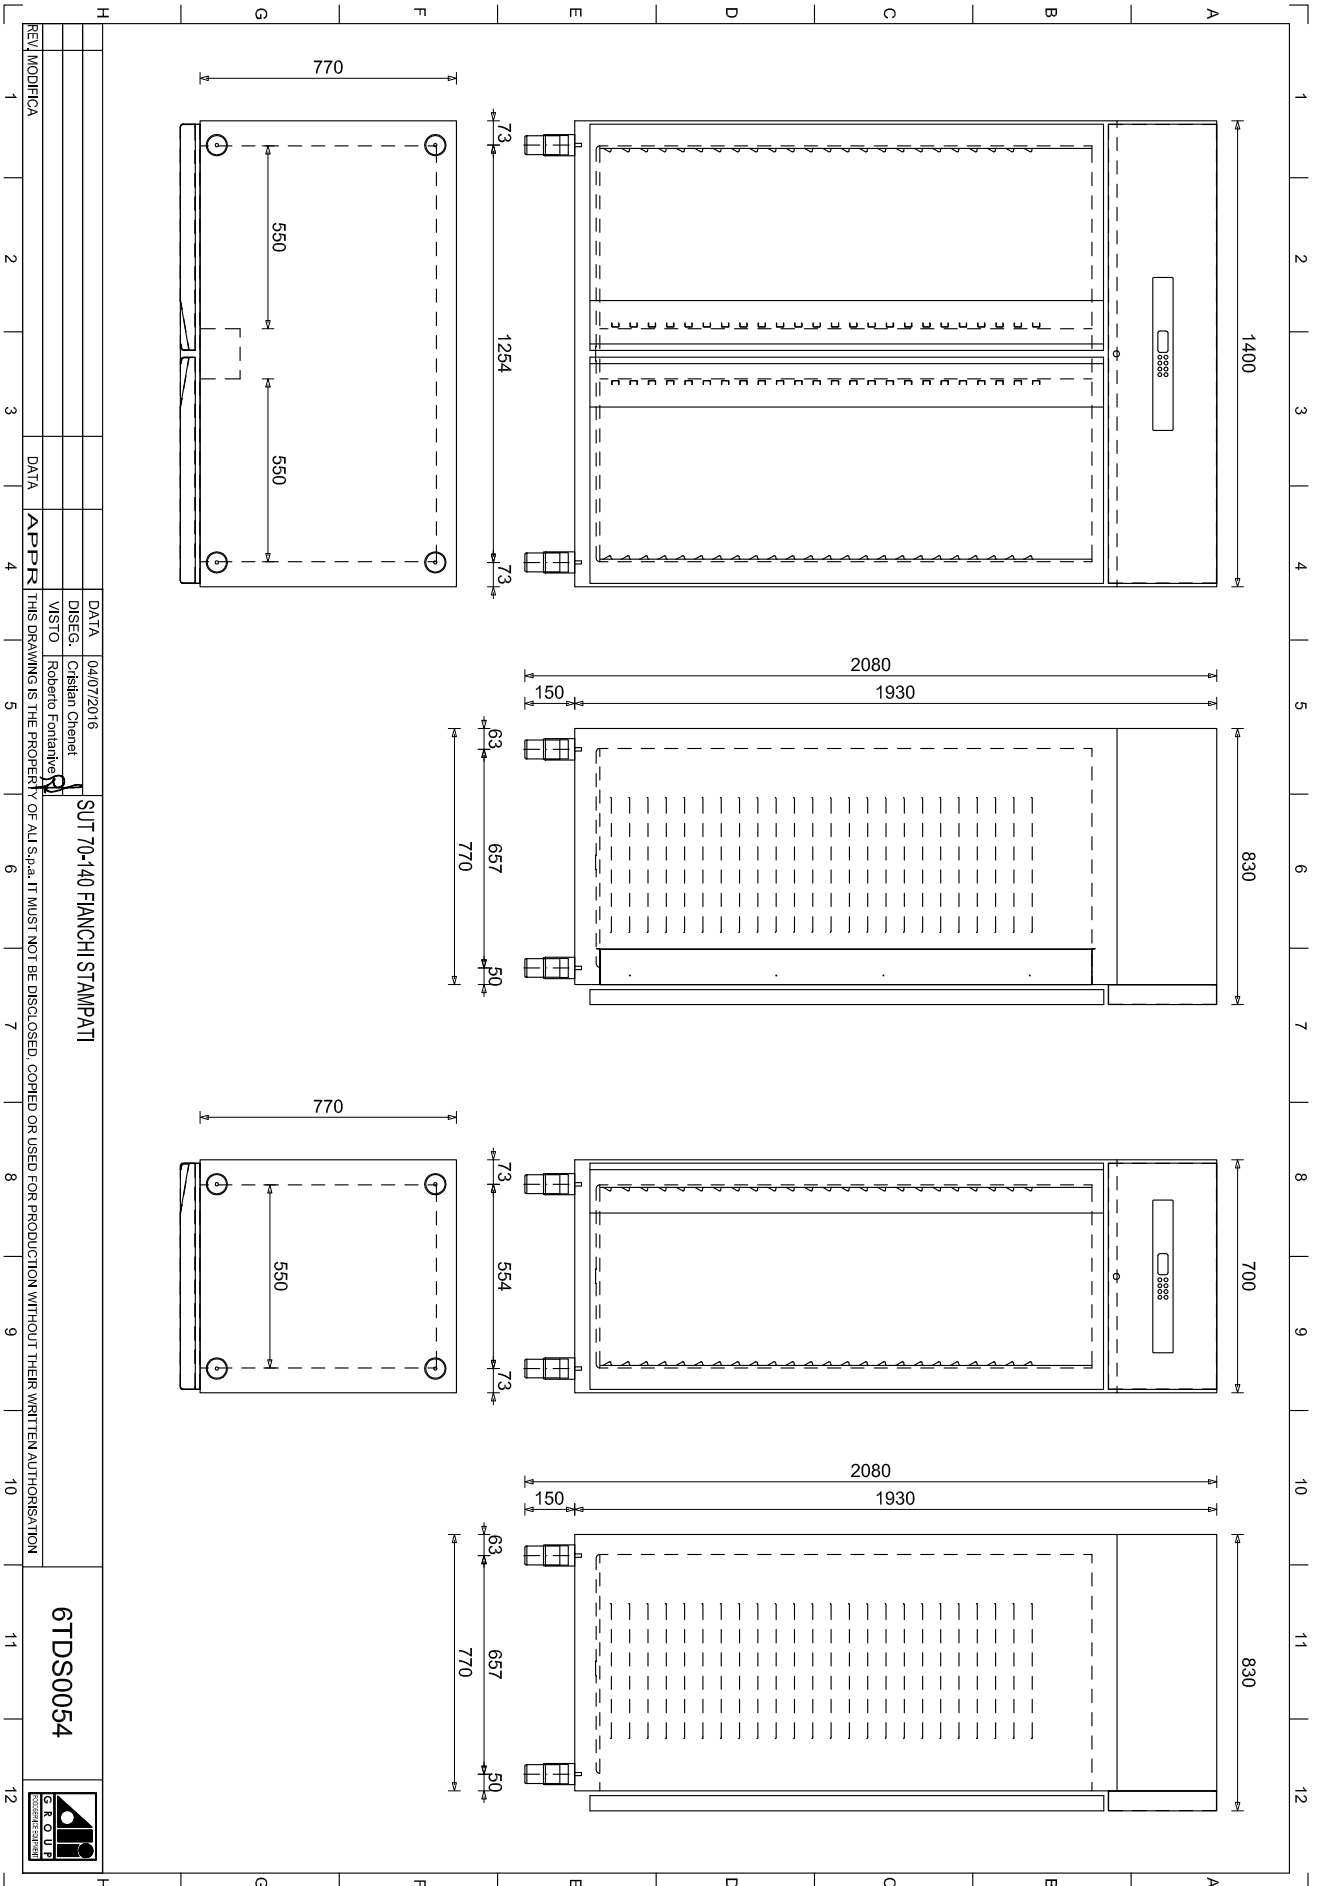

REV/MODIFICA	1	2	3	4	5	6	7	8	9	10	11	12
DATA												
DISSEG.												
VISTO												
DATA												
APPR												
SUT 70-140 FIANCHI STAMPATI												
6TDS0054												

THIS DRAWING IS THE PROPERTY OF ALL S.p.A. IT MUST NOT BE DISCLOSED, COPIED OR USED FOR PRODUCTION WITHOUT THEIR WRITTEN AUTHORIZATION