

Modular Super-Flake Ice Machine up to 600 Kg/24h.

Other models in this range:
MF 46 - MF 47 - MF 57 - MF 58 Split
MF 59 Split - MF 66 - MF 68 Split
MF 69 Split - MF 86 - MF 88 Split




Available in remote condenser version (R.C. sold separately)



ABS plastic top cover



Stainless Steel



Electronic Controls

Features

- Modular Superflake ice machine, production up to 600 kg in 24 hours
- Hermetic compressor
- Choice of air, water or remote air-cooled condensers
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry)
- Long-lasting stainless steel ball-bearings
- Double protection - electronic rotation sensor and drive coupling-on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics
- Side panels are removable on all four sides to ease maintenance and after-sales service operations
- ABS plastic top cover
- Reduced height to ease installation
- CFC Free R-404A Refrigerant

Optional Features (special order):

- UV lamp for bacterial control
- Anti-scale, anti-algae water filtration system



MF 56+SB193+Top (sold separately)

MF 56+SB322+Top (sold separately)

MF 56+SB393+Top (sold separately)



MF 56+SB530+Top (sold separately)

MF 56+SB550+Top (sold separately)

MF 56+SB948+Top (sold separately)



MF 56+SB1025+Top (sold separately)

2xMF 56+UBH1100/UBH1600 (sold separately)

MF 56+RBCSTAND (sold separately)



MF 56+SIS300 (sold separately)

MF 56+SIS700 (sold separately)

MF 56+SIS1350 (sold separately)

This product qualifies for the following listings:



MF 56 Technologies



	+C° -C°	24h		21°: 15°C		W D H [WxDxH mm] 538X663X790
		10°: 10°C [kg] [lbs]				
MF 56 AS	✪	600	1323	540	1190	[WxDxH inches] 213/16 x 261/8 x 311/8
MF 56 WS	☾	600	1323	560	1234	
MF 56 ASR	✪	600	1323	540	1190	
				[v/Hz/ph] 230/50/1 also available in 230/60/1		R 404 A

Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.



Residual water content 15%

2 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001:2000

www.scotsman-ice.it
www.scotsman-ice.com
www.scotsman-ice-on-tablet.com

Models and specifications are subject to change without notice.

Other models in this range:
 MF 46 - MF 47 - MF 57 - MF 58 Split
 MF 59 Split - MF 66 - MF 68 Split
 MF 69 Split - MF 86 - MF 88 Split

Modular Super-Flake Ice Machine up to 600 Kg/24h.

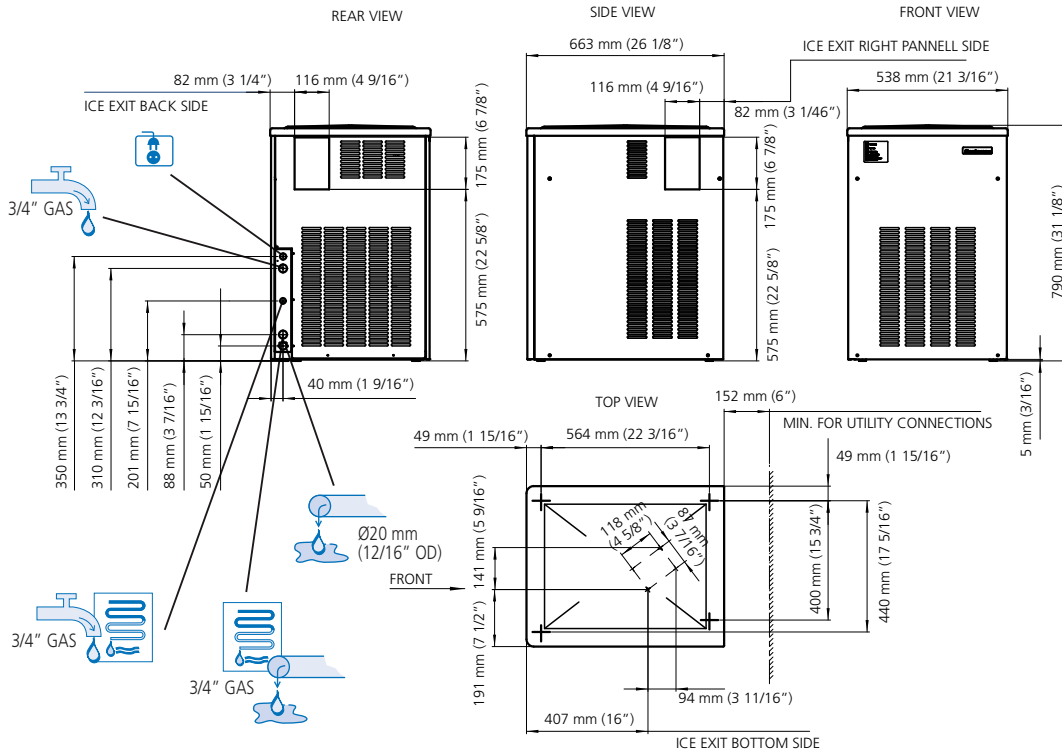

MF 56 AIR COOLED

°F \ °C	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	600	560	520	440	kg
50°	1323	1234	1146	970	lbs
21°	580	540	500	420	kg
70°	1278	1190	1102	926	lbs
32°	500	470	440	380	kg
90°	1102	1036	970	838	lbs
38°	410	390	370	330	kg
100	904	860	816	727	lbs

MF 56 WATER COOLED

°F \ °C	°C				kg
	50° 10°	60° 15°	70° 21°	90° 32°	
10°	600	570	540	480	kg
50°	1323	1256	1190	1058	lbs
21°	590	560	530	470	kg
70°	1300	1234	1168	1036	lbs
32°	580	550	520	460	kg
90°	1278	1212	1146	1014	lbs
38°	570	540	513	450	kg
100	1256	1190	1131	992	lbs



(in 230/50/1 specs)



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Icon	Unit	Value	Unit	Value	Unit	Value	Unit	Value	Unit	Value	Unit							
MF 56 AS	Icon: Fan	[Btu/h] [W]	17152 5030	[Ømm²]	3x1.5	[W]	2000	FUSE	16 A	[kWh] - 100 Kg	10,2	[l/h]	18	[gal/h]	4.8	[kg] [lbs]	94 207	[kg] [lbs]	103 227
MF 56 WS	Icon: Water	[Btu/h] [W]	17152 5030	[Ømm²]	3x1.5	[W]	2000	FUSE	16 A	[kWh] - 100 Kg	8,7	[l/h]	185	[gal/h]	49	[kg] [lbs]	94 207	[kg] [lbs]	103 227
MF 56 ASR	Icon: Fan	[Btu/h] [W]	17152 5030	[Ømm²]	3x1.5	[W]	2000	FUSE	16 A	[kWh] - 100 Kg	10,2	[l/h]	18	[gal/h]	4.8	[kg] [lbs]	88 194	[kg] [lbs]	97 213